




新乡市浩宇起重机械有限公司
Xinxiang HY Crane Co.,Ltd

新乡市浩宇起重机械有限公司
Xinxiang HY Crane Co.,Ltd



JM型电控慢速卷扬机（起重、路桥、安装行业）

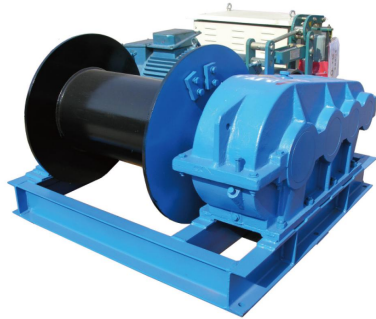

本系列为齿轮减速机传动卷扬机。主要用于卷扬、拉卸、拖拽重物。如各种大中型砼、钢结构及机械设备的安装和拆卸。适用于建筑安装公司、矿区、工厂的土木建筑及安装工程。

This series is gears reducer driving Mainly used for hoisting pull and unloading tow the weight drop For example all kinds of large and middle concrete constructure of steel, installation and disassembly of mechanical equipment. It is suitable for construction and installation engineering of construction enterprise mining area factory and etc.

JM型电控慢速卷扬机技术参数表
JM series electronic control slow speed winch technical parameter table

基础参数 Basic data 型号 type	额定拉力 rated load (KN)	额定速度 rated speed	容绳量 rope capacity (m)	钢丝绳直径 rope diameter	电机型号 Electromotor type	电机功率 Electromotor power (KW)	外形尺寸 orm dimension (mm)	整机质量 weight (kg)	型式 Type
JM1	10	15	100	Φ9.3	Y112M-6	3	620×701×417	270	
JM1.6	16	16	150	Φ12.5	Y132M ₂ -6	5.5	945×996×570	500	
JM2	20	16	150	Φ13	Y160M-6	7.5	945×996×570	550	
JM3.2	32	9.5	150	Φ15.5	YZR160M ₂ -6	7.5	1430×1160×910	1100	开式齿
JM3.2B	32	12	195	Φ15.5	YZR160M ₂ -6	7.5	1082×1014×610	536	四轴
JM5	50	10	270	Φ21.5	YZR160L-6	11	1235×1230×805	1560	四轴
JM5B	50	9.5	200	Φ21.5	YZR160L-6	11	1620×1260×945	1800	开式齿
JM5C	50	9.5	250	Φ21.5	YZR160L-6	11	1235×1230×805	1800	四轴
JM5D	50	15	250	Φ21.5	YZR180L-6	15	1235×1230×805	1850	四轴
JM5E	50	20	250	Φ21.5	YZR200L-6	22	1235×1230×805	2000	四轴
JM6	60	9.5	270	Φ24	YZR180L-6	15	1235×1509×805	1800	四轴
JM8	80	8	250	Φ26	YZR180L-6	15	2090×1475×956	2900	开式齿
JM8B	80	9.5	350	Φ26	YZR180L-6	15	1075×1598×985	2650	四轴

可根据用户需要设计、制造各种规格非标产品，以上参数如有技术改进，恕不另行通知。
We can design and manufacture all kinds of non-standard product according to our customer's need. If the technique dates above changed, sorry not to inform.


JM型电控慢速卷扬机工程实例（起重、路桥、安装行业）



JC80吨工程门式起重机
起重量：80吨 起升速度：0.8m/min
起升高度：21m 小车轨距：2.5m




JM12.5吨变频双速卷扬机
变频调速，配低速端带式制动器用于中铁大桥局
高速铁路JQ900吨下导梁架梁机



JM8吨慢速卷扬机
绳速：9m/min 行程：40m
首钢集团迁安钢厂拉钢包用



JM8吨慢速卷扬机
绳速：12m/min 容绳量：380m
郑州大方桥梁提梁机用



JM10吨慢速卷扬机拉力100KN
绳速：9.5m/min 容绳量：300米
中铁大桥局80吨门式起重机用



JM6吨慢速卷扬机
绳速：10m/min 容绳量：90m
低速端配带式制动器



新乡市浩宇起重机械有限公司
Xinxiang HY Crane Co.,Ltd

新乡市浩宇起重机械有限公司
Xinxiang HY Crane Co.,Ltd



JM型电控慢速大吨位卷扬机（起重、路桥、安装行业）



本系列卷扬机主要用于各种大型、特大型砼、钢结构及机械设备的安装和拆卸。其结构特点是钢丝绳排列有序、起吊安全可靠。适用于各种桥梁、港口、码头等路桥工程及大型厂矿工程设备安装。

This series winch mainly used for large and oversize concrete construction of steel installation and disassembly of mechanical equipment. This structural characteristics is wire rope orderly arrangement lifting is safe and reliable. It is suitable for bridge port and ect road and bridge engineering and large factories and mines engineering equipments installation.

JM型电控慢速大吨位卷扬机技术参数表

JM series electronic control slow speed large tonnage winch technical parameter table

基础参数 Basic data 型号 type	额定拉力 rated load (KN)	额定速度 rated speed	容绳量 rope capacity (m)	钢丝绳直径 rope diameter	电机型号 Electric motor type	电机功率 Electric motor power (KW)	外形尺寸 orm dimension (mm)	整机质量 Weight (kg)
JM10	100	8	170	Φ30	YZR200L-6	22	2090×1475×956	3000
JM10B	100	9.5	250	Φ30	YZR200L-6	22	1705×1598×985	3500
JM12.5	125	8	300	Φ34	YZR225M-6	30	2880×2200×1550	5000
JM13.5	135	0~5	290	Φ28	YZP225S-8	22	2990×2363×1650	6500
JM16	160	10	500	Φ37	YZR250M2-8	37	3750×2400×1850	8800
JM20	200	10	600	Φ43	YZR280S-8	45	3950×2560×1950	9900
JM25	250	9	700	Φ48	YZR280M-8	55	4350×2800×2030	13500
JM32	320	9	700	Φ56	YZR315S-8	75	4500×2850×2100	14800
JM50	500	9	800	Φ65	YZR315M-8	90	4930×3050×2250	19500
JM65	650	10.5	3600	Φ64	LA8315-8AB	160	5900×4680×3200	46000

可根据用户需要设计、制造各种规格非标产品，以上参数如有技术改进，恕不另行通知。
We can design and manufacture all kinds of non-standard product according to our customer's need. If the technique dates above changed, sorry not to inform.


JM型电控慢速大吨位卷扬机工程案例（起重、路桥、安装行业）



新奥船厂用 JM32吨卷扬机
容绳量：1000m 额定速度9m/min




烟台莱福士2万吨门式起重机主起升用 JM65吨卷扬机
容绳量：3600m 额定速度：10.5m/min

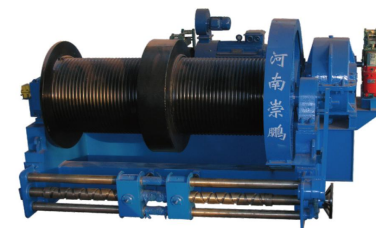

河南矿山75T-75m起重小车主起升用 JM2×10吨卷扬机
容绳量：2×350m 额定速度：10m/min



中海油基地拖船用 JM30吨卷扬机
容绳量：2000m 额定速度：10m/min

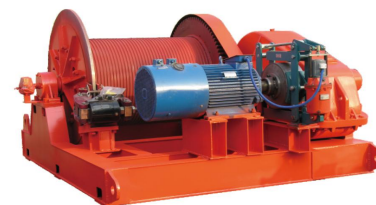

中铁二十二局450+450吨提梁机主起升用 JM13.5吨卷扬机
容绳量：380m 额定速度：5m/min



中铁十四局900吨架桥机主起升用 JT12吨卷扬机
容绳量：410m 额定速度：14m/min




新乡市浩宇起重机械有限公司
Xinxiang HY Crane Co.,Ltd

新乡市浩宇起重机械有限公司
Xinxiang HY Crane Co.,Ltd



JK型电控快速卷扬机（钻机、起重、安装行业）

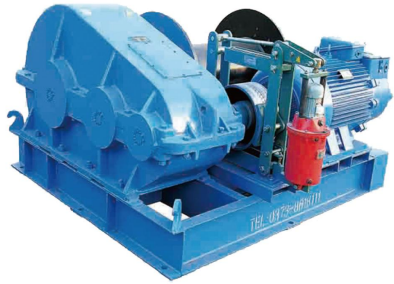

本系列卷扬机主要用于建筑施工中的物料提升、迁移重物和起重机上作为主提升，市井架、龙门架和起升小车专用提升卷扬机。适用于建筑、矿区起重及工厂的土木建筑施工工程及小型设备安装。


This series winch mainly used for materials lifting and traction the weight droops during construction. It also used for crane as main hoist; it is the special winch of derrick and gantry frame and lifting trolley. It is suitable for construction and small equipments installation of construction mine ear lifting factory.

JK型电控快速卷扬机技术参数
JK series electric control high speed winch technical parameter table

基础参数 Basic data 型号 type	额定拉力 rated load (KN)	额定速度 rated speed	容绳量 rope capacity (m)	钢丝绳直径 rope diameter	电机型号 Electric motor type	电机功率 Electromotor power (KN)	外形尺寸 orm dimension (mm)	整机质量 Weight (kg)
JK0.5	5	22	190	Φ7.7	Y100L-4	3	620×701×417	200
JK1	10	22	100	Φ9.3	Y112M-4	4	620×701×417	300
JK1.6	16	24	150	Φ12.5	Y132S-4	5.5	945×996×570	500
JK2	20	24	150	Φ13	Y132M-4	7.5	945×996×570	550
JK3.2	32	25	290	Φ15.5	YZR180L-6	15	1325×1335×840	1011
JK3.2B	32	30	250	Φ15.5	YZR200L-6	22	1900×1738×985	1500
JK5	50	30	300	Φ21.5	YZR225M-6	30	1900×1620×985	2050
JK5B	50	25	210	Φ21.5	YZR225M-8	22	2250×2500×1300	2264
JK8	80	25	160	Φ26	YZR280S-8	45	1533×1985×1045	3000
JK10	100	30	300	Φ30	YZR315S-8	55	2250×2500×1300	5100

可根据用户需要设计、制造各种规格非标产品，以上参数如有技术改进，恕不另行通知。
We can design and manufacture all kinds of non-standard product according to our customer's need. If the technique dates above changed, sorry not to inform.

JK型电控快速卷扬机工程实例（钻机、起重、安装行业）

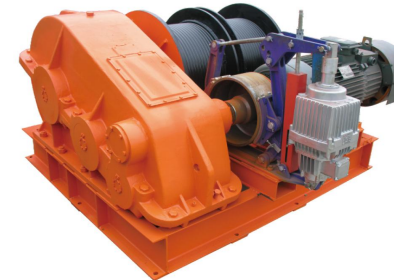


JK10吨电动快速卷扬机
用于MG40吨吊钩门式起重机主起升机构
(中铁十七局第三工程有限公司)




JK8吨电动快速卷扬机
用于MG80吨吊钩门式起重机主起升机构
(中国三峡总公司溪洛渡工程)




ZKL800-30螺旋钻机用
JK8吨卷扬机

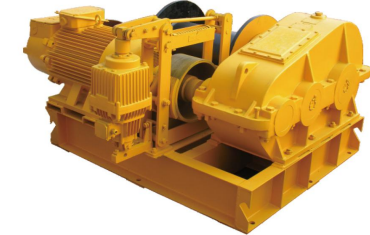

ZKL800-26螺旋钻机用
JK5吨卷扬机



JK9吨快速卷扬机
绳速：30m/min 容绳量：650m




JK5吨快速卷扬机
绳速：49.2m/min 行程：40m
洛阳矿业集团纳米公司石灰窖上料用



新乡市浩宇起重机械有限公司
Xinxiang HY Crane Co.,Ltd

JKL手控溜放快速卷扬机

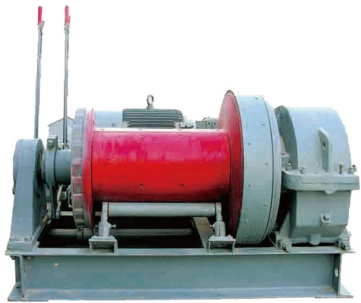

本系列卷扬机主要用于建筑工地、厂矿、港口等工程垂直提升重物，尤其适用于桥梁、码头、建筑基础工程自由落体冲孔打桩作业。其结构特点为主轴旋转（俗称转轴）。

This series winch mainly used for construction factory and mine port and ect engineering vertical lifting weight drops,especially used in bridge dock construction base engineering freefall punching piling operation.The structural character istics is main shaft rotating(known as rotating shaft).

JKL手控溜放快速卷扬机技术参数表

JKL series hand control high speed free rolling winch technical parameter table


基础参数 Basic date 型号 type	额定拉力 rated load (KN)	平均绳速 (m/min)	容绳量 rope capacity (m)	钢丝绳直径 rope diameter	电机型号 Lelectromotor type	电机功率 Electromotor power (KN)	外形尺寸 orm dimension (mm)	整机质量 Weight (kg)
JKL2	20	30	150	Φ13	Y180L-6	15	1370×1650×1210	1200
JKL3	30	30	200	Φ15	Y200L-6	22	1690×1740×1200	1800
JKL5	50	30	250	Φ21	Y225S-6	37	2300×2100×1650	3000
JKL6	60	36	250	Φ24	Y280S-6	45	2350×2100×1650	3200
JKL8	80	29	250	Φ26	Y280M-6	55	2440×2500×1800	5500
JKL10	100	29	250	Φ28	Y315S-6	75	2590×2540×1800	5800

可根据用户需要设计、制造各种规格非标产品，以上参数如有技术改进，恕不另行通知。
We can design and manufacture all kinds of non-standard product according to our customer's need. If the technique dates above changed, sorry not to inform.

新乡市浩宇起重机械有限公司
Xinxiang HY Crane Co.,Ltd



JK-D一字型卷扬机

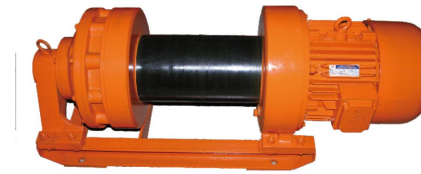

JK-D型系列卷扬机是采用少齿差行星传动的新型卷扬机，是目前传统卷扬机更新换代的理想产品。它具有结构紧凑、运转平稳、操作方便、维护简单、低噪音级、使用寿命长等优点。广泛应用于建筑施工、码头、桥梁、冶金等行业的起重与安装，符合国家GB/T10055-1996施工升降机安全规则及国家行业标准JGJ88-92提升机安全技术规范要求。

JK-D series winch is a new hoist which is a planetary drive with small teeth ditterence,It is also the ideal replacement of traditional hoist.It has compact structure,stable running, convenient operation,easy maintenance,10W noise level,the advantages of long life.JK-D series winch is widely use in building construction,piers,bridges,and metallurgical industries of lifting and installation.This series winch is not only in line with national CB/T10055-1996 construction hoist safety rules but also in keeping with national industry standards JGJ88-92 Elevator Safety Technical Specifications.

JK-D一字型卷扬机技术参数表

JK-D series winch technical parameter tabl

基础参数 Basic date 型号 type	额定拉力 rated load (KN)	钢丝绳直径 rope diameter	额定速度 rated speed	额定功率 rated power	容绳量 rope capacity (m)	外形尺寸 orm dimension (mm)	整机质量 Weight (kg)
JK0.75D	7.5	Φ9.3	30	3	100	900×340×400	165
JK1.25D	12.5	Φ11	46	7.5	120	1140×400×450	315
JK1.60D	16	Φ12.5	28	7.5	160	1200×440×480	350
JK2.0D	20	Φ13	36	13	190	1400×470×548	510

注：JK0.75D、JK1.25D型卷扬机的额定拉力为双绳许用拉力。
可根据用户需要设计、制造各种规格非标产品，以上参数如有技术改进，恕不另行通知。
We can design and manufacture all kinds of non-standard product according to our customer's need. If the technique dates above changed, sorry not to inform.